



RIG NO. 15

CLASSIFICATION: 750 HP Trailer Mechanical

SWIVEL:

Ideco TL 200-ton

DRILLING DEPTH CAPACITY:

9,500 w/ 4-1/2" dp

DRILL PIPE:

4-1/2" od

POWER SYSTEM:

Two (2) 60 series Detroit diesel engines with Allison 5860 transmissions and two (2) Cat D-3408 diesel engines with two 320 KW generators

DRILL COLLARS:

As Required

DRAW WORKS:

Cabot Model 750 with Parmac SR 22" single hydromatic and two (2) engine compound

ANNULAR PREVENTER:

Hydril GK 11" 5000 psi WP

MAST:

Double telescoping 112' mast rated to 300,000# SHL

RAM PREVENTERS:

Shaffer LWS 11" 5000 psi WP double ram

DRILL LINE:

1-1/8"

CHOKE MANIFOLD:

4-1/16" x 2-1/16" 5000 psi WP

SUBSTRUCTURE:

Cabot 15' telescoping with 300,000# rotary capacity with a setback capacity of 200,000#, 12' clear height from rotary beam to ground

ACCUMULATOR SYSTEM:

JEBCO 5 station with remote 80 gal.

MUD PUMPS:

Two (2) GD PZ-8 each powered by one (1) CAT 398

MUD SYSTEM:

One (1) Tank 350 BBL System
Two (2) Brandt Cobra Shakers
Brandt 2 cone desander
Brandt 10 cone desilter
Drilco Degasser

ROTARY:

Ideco 27-1/2"

AUXILLARY EQUIPMENT:


Toolpusher and crew quarters
500 bbls water tank
Automatic driller
Pipe spinner
Kelly spinner
Totco electronic drilling recorder
0-7 degree drift indicator

BLOCK AND HOOK:

McKissick 150 ton block
BJ 150 ton hook




Rig No. 15

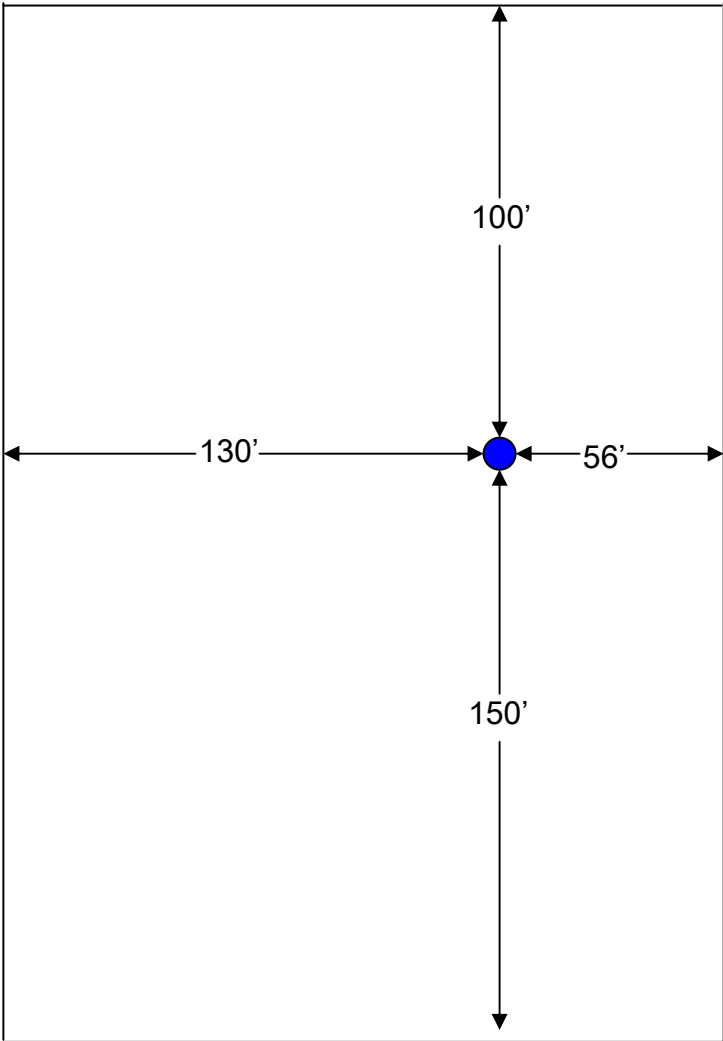


Mouse hole:
4' 8" towards V-door,
16' deep

Rat hole:
1' towards V-door
and 8' 8" off center to left,
26' deep

Note: Pits on right side.



● Water well

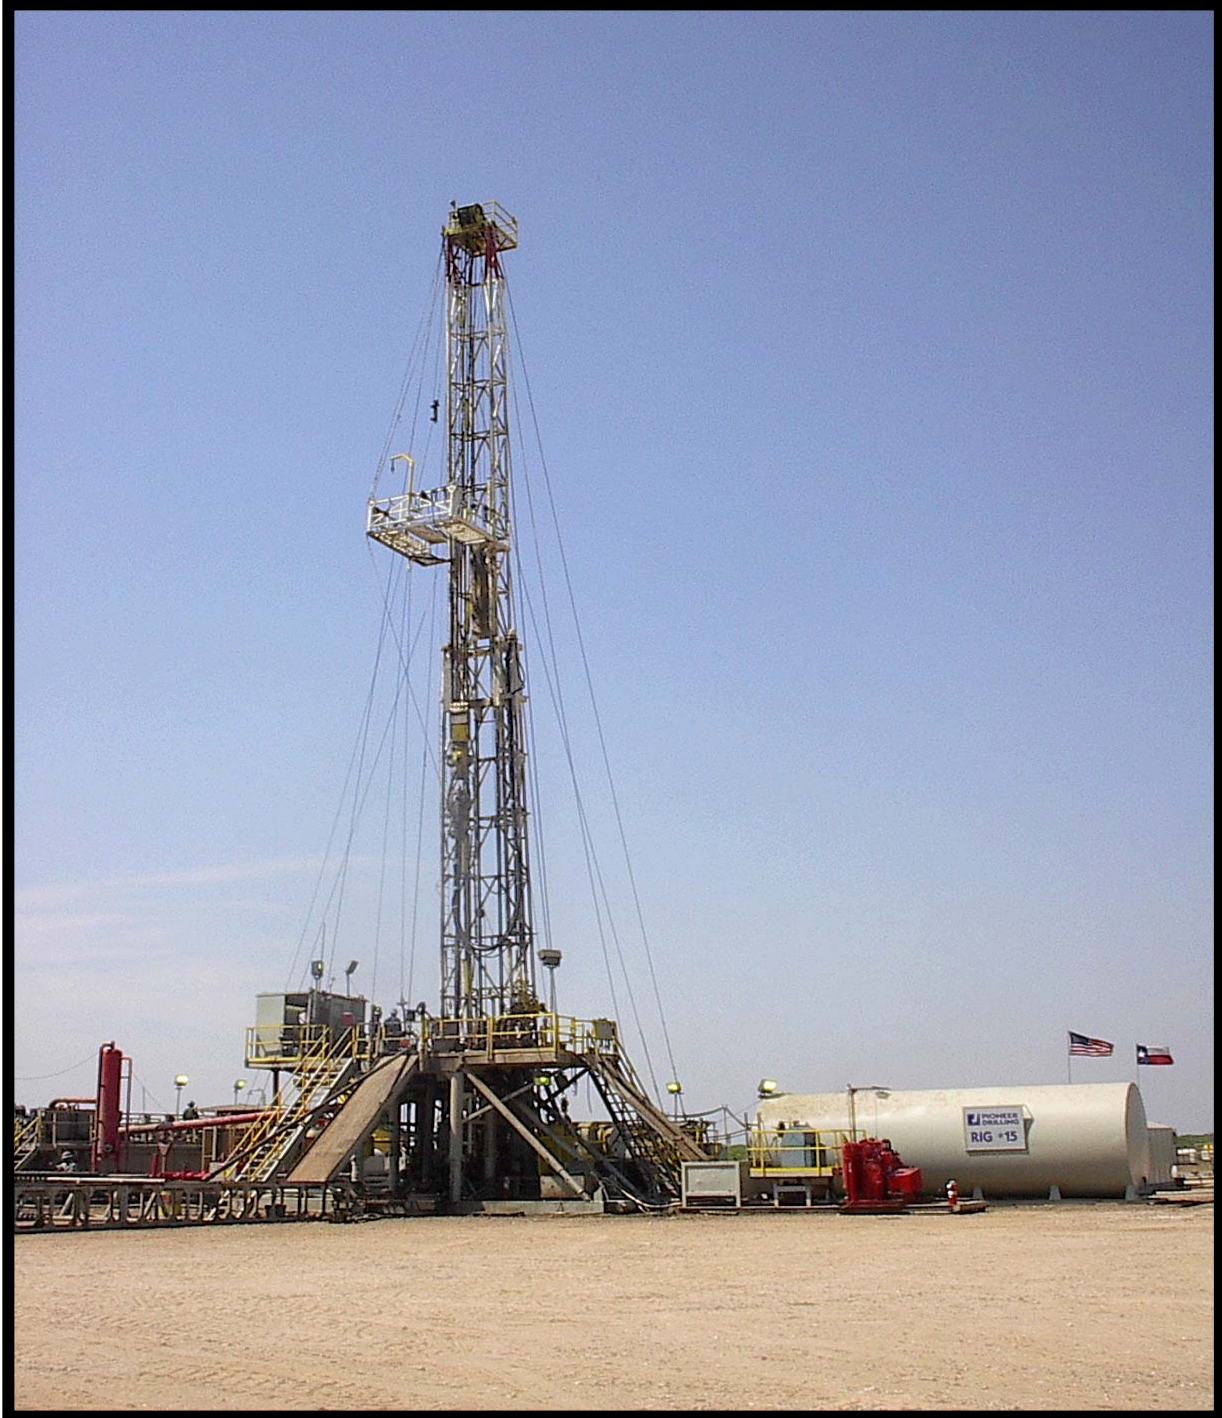

RIG #15